





DESIGN ANDREA CROSETTA


$$p_{\max} = 6.5 \text{ bar}$$

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

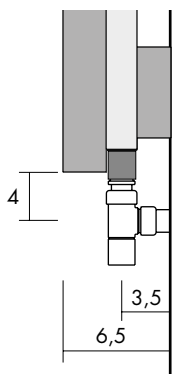

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

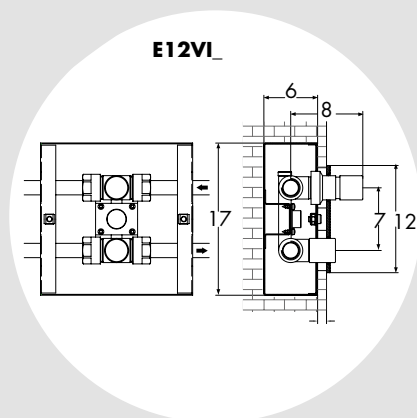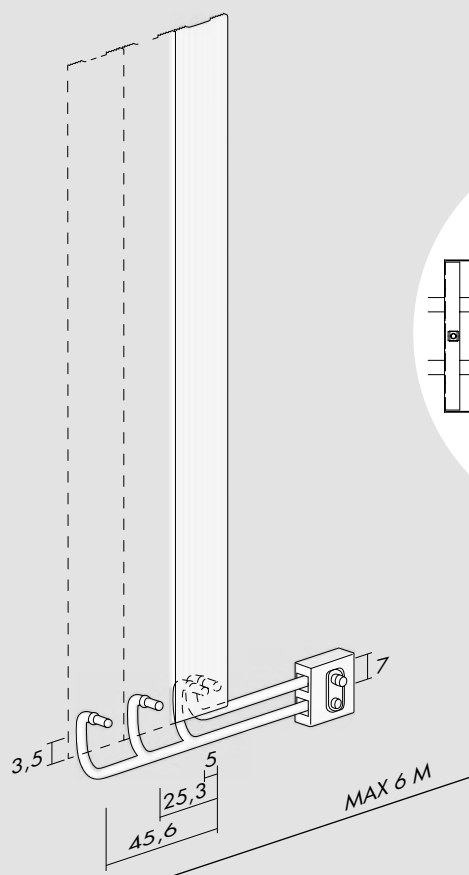

24

Loft V

H cm	L cm	l* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
150.0	20.0	5.0	LFV150001_	1.1	167	336
150.0	40.3	25.3	LFV150002_	2.2	334	672
150.0	60.6	45.6	LFV150003_	3.4	501	1 008
170.0	20.0	5.0	LFV170001_	1.2	185	373
170.0	40.3	25.3	LFV170002_	2.5	371	746
170.0	60.6	45.6	LFV170003_	3.8	557	1 120
200.0	20.0	5.0	LFV200001_	1.4	218	439
200.0	40.3	25.3	LFV200002_	2.9	436	878
200.0	60.6	45.6	LFV200003_	4.3	655	1 317

Optional



Reverse Valve
 Vanne reverse
 Reverse Ventil
 Válvula a escuadra inversa

[BIAN] **E12RVB**
 [CROM] **E12RVR**




Built-in valves
 Vanne encastrer
 Einbauventile
 Válvulas de empotrar

[BIAN] **E12VIB**
 [CROM] **E12VIR**




Thermostatic head
 Tête thermostatique
 Thermostatkopf
 Cabezal termostático

[BIAN] **TTB**
 [CROM] **TTR**



Sleeving kit
 Kit couvre tuyau
 Rosetten
 Kit cubre tubo

[BIAN] **C5B**
 [CROM] **C5R**



$\varnothing \leq 16$ mm
 [BIAN] **CTB**
 [CROM] **CTR**

 $16 \text{ mm} < \varnothing < 24 \text{ mm}$
 [BIAN] **CWB**
 [CROM] **CWR**

art* = item / modèle / Artikel / artículo **l*** = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
P* = page / page / Seite / página

Loft Bath



DESIGN ANDREA CROSETTA



Kcal = Watt x 0.860
BTU = Watt x 3.413


Watt Δt 60° = Watt Δt 50° x 1.283
Watt Δt 40° = Watt Δt 50° x 0.737
Watt Δt 30° = Watt Δt 50° x 0.497
Watt Δt 20° = Watt Δt 50° x 0.285

p max = 6.5 bar

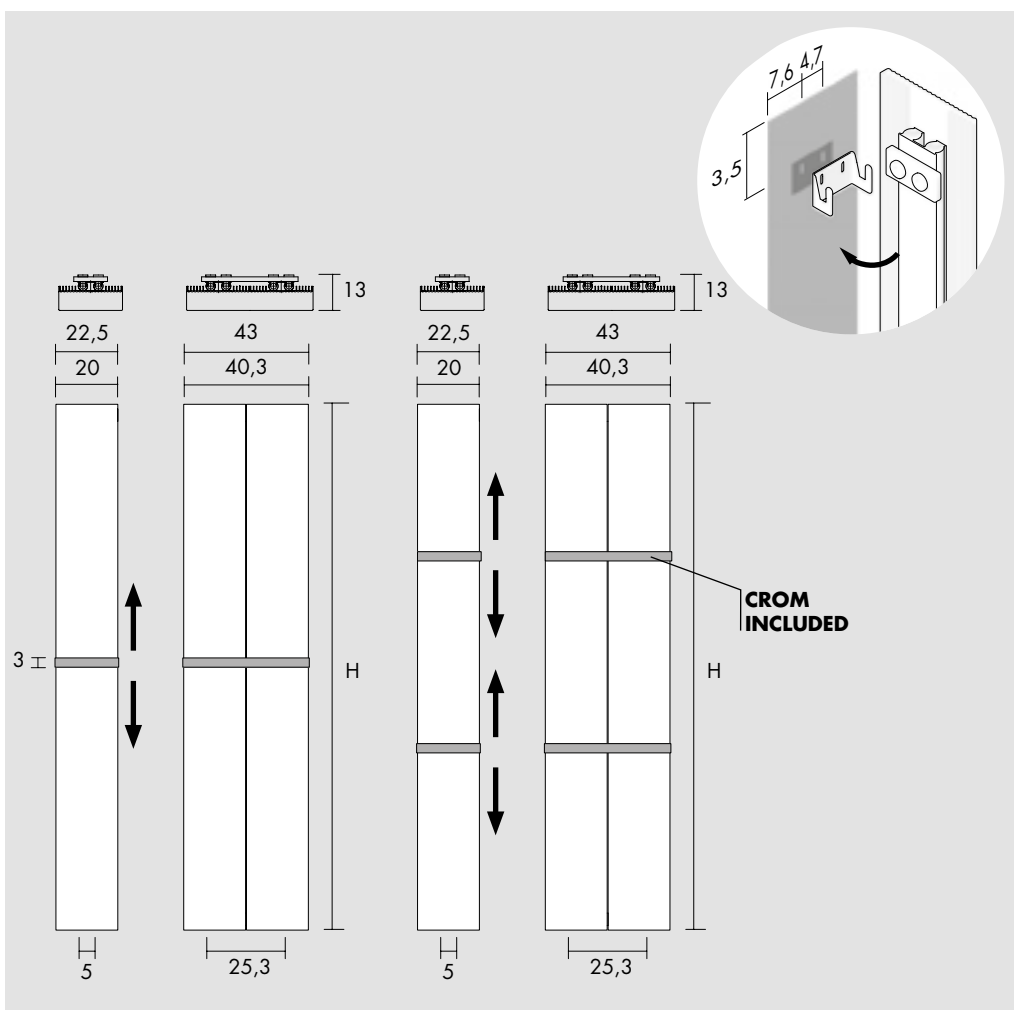



[F]

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

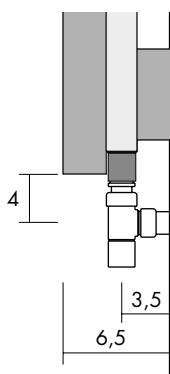

[H]

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

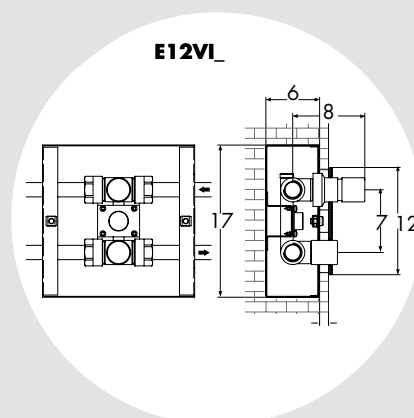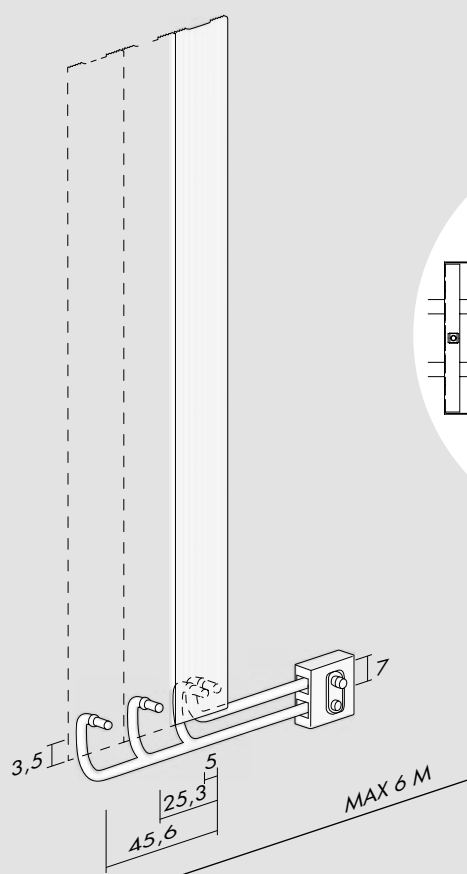

Built-in valves
Vanne encastrer
Einbauventile
Válvulas de empotrar

Loft Bath 1 Towel bar / 1 porte-serviettes / 1 Schäkel / 1 barra para toalla

H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
150.0	20.0	5.0	LF1B150001	1.1	167	336
150.0	40.3	25.3	LF1B150002	2.2	334	672
170.0	20.0	5.0	LF1B170001	1.2	185	373
170.0	40.3	25.3	LF1B170002	2.5	371	746
200.0	20.0	5.0	LF1B200001	1.4	218	439
200.0	40.3	25.3	LF1B200002	2.9	436	878

Loft Bath 2 Towel bars / 2 porte-serviettes / 2 Schäkeln / 2 barra para toallas


H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
150.0	20.0	5.0	LF2B150001	1.1	167	336
150.0	40.3	25.3	LF2B150002	2.2	334	672
170.0	20.0	5.0	LF2B170001	1.2	185	373
170.0	40.3	25.3	LF2B170002	2.5	371	746
200.0	20.0	5.0	LF2B200001	1.4	218	439
200.0	40.3	25.3	LF2B200002	2.9	436	878

Optional




Reverse Valve
 Vanne reverse
 Reverse Ventil
 Válvula a escuadra inversa

[BIAN] **E12RVB**
 [CROM] **E12RVR**




Built-in valves
 Vanne encastrer
 Einbauventil
 Válvulas de empotrar

[BIAN] **E12VIB**
 [CROM] **E12VIR**




Thermostatic head
 Tête thermostatique
 Thermostatkopf
 Cabezal termostático

[BIAN] **TTB**
 [CROM] **TTR**



Sleeving kit
 Kit couvre tuyau
 Rosetten
 Kit cubre tubo

[BIAN] **C5B**
 [CROM] **C5R**



$\varnothing \leq 16$ mm
 [BIAN] **CTB**
 [CROM] **CTR**
 $16 \text{ mm} < \varnothing < 24 \text{ mm}$
 [BIAN] **CWB**
 [CROM] **CWR**




Towel bar
 Porte-serviettes
 Handtuchhalter
 Porta toallas

1 Towel bar / 1 porte-serviettes / 1 Handtuchhalter / 1 porta toallas
 [CROM] INCLUDED
 [COLOUR] **SLF1C**
 [GOLD] **SLF1G**

2 Towel bars / 2 porte-serviettes / 2 Handtuchhalter / 2 porta toallas
 [CROM] INCLUDED
 [COLOUR] **SLF2C**
 [GOLD] **SLF2G**


art* = item / modèle / Artikel / artículo **I*** = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
P* = page / page / Seite / página

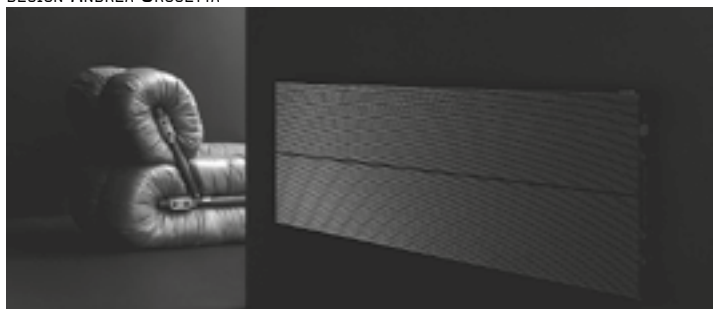

$Kcal = Watt \times 0.860$
 $BTU = Watt \times 3.413$


$Watt \Delta t 60^\circ = Watt \Delta t 50^\circ \times 1.283$
 $Watt \Delta t 40^\circ = Watt \Delta t 50^\circ \times 0.737$
 $Watt \Delta t 30^\circ = Watt \Delta t 50^\circ \times 0.497$
 $Watt \Delta t 20^\circ = Watt \Delta t 50^\circ \times 0.285$

$p_{max} = 6.5 \text{ bar}$

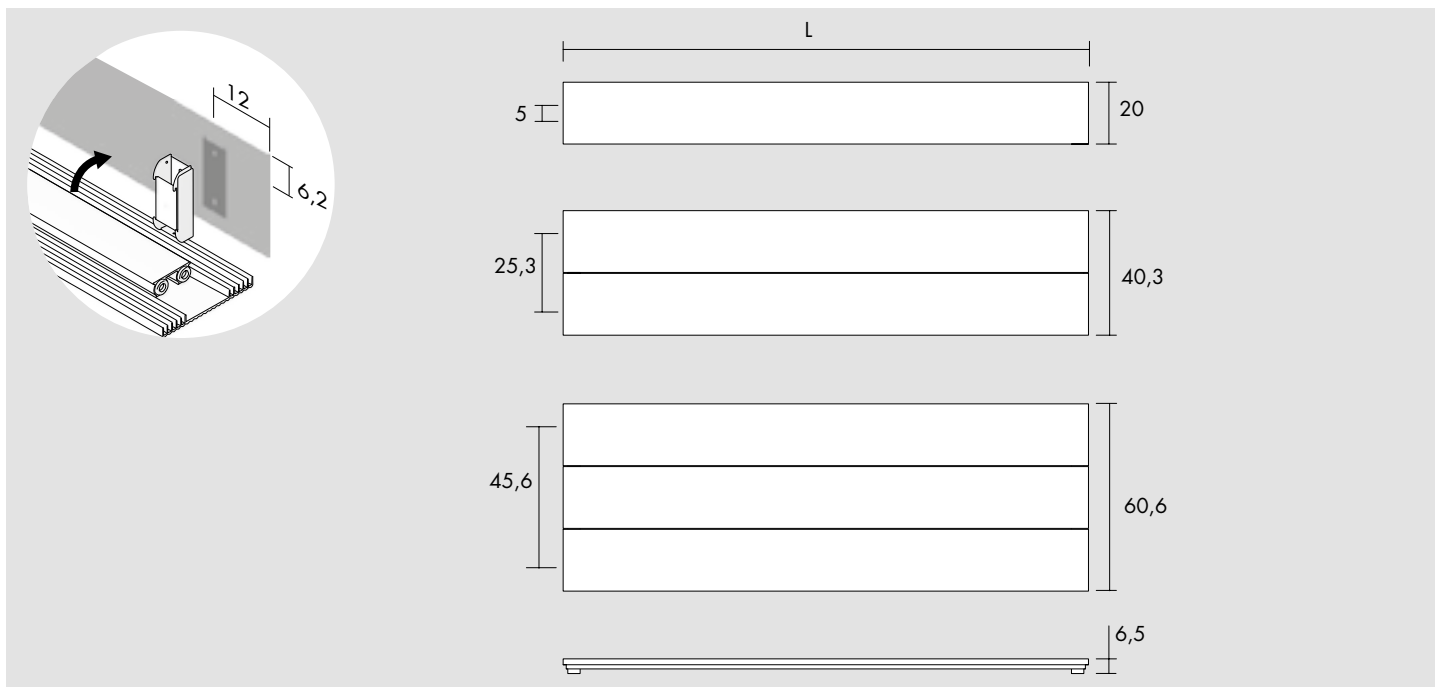


[F]

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

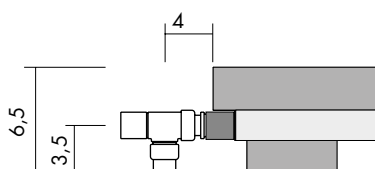

[H]

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

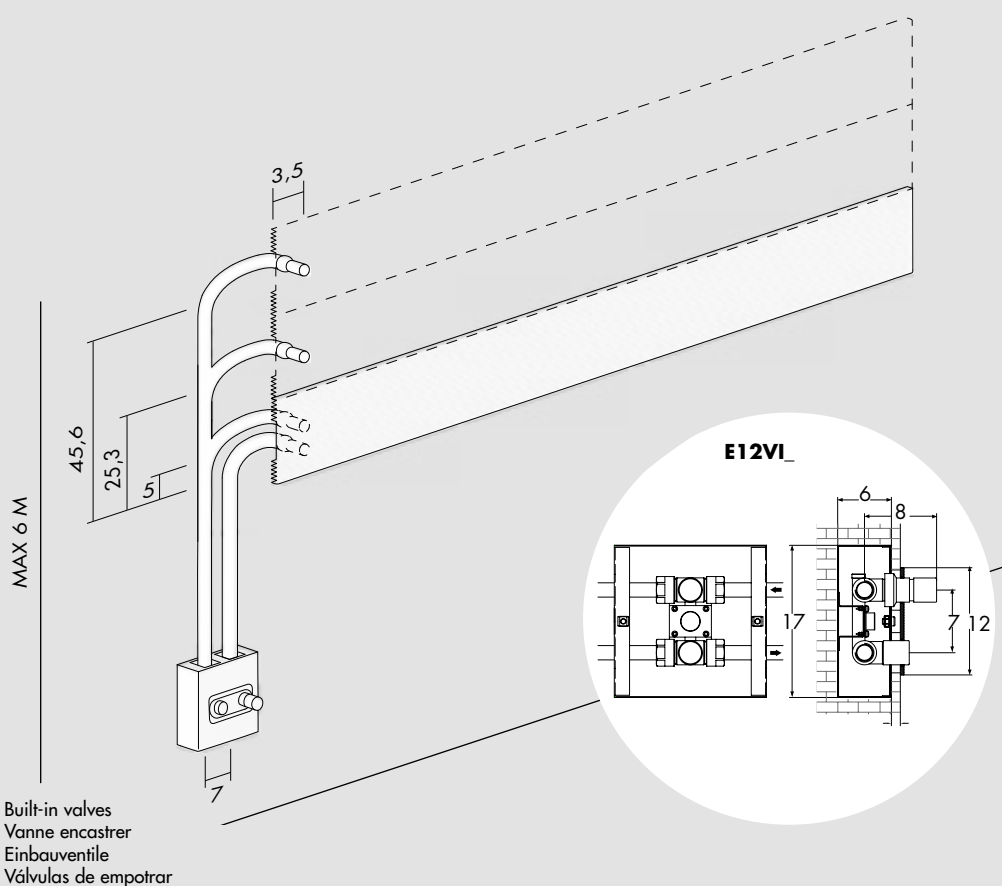

Loft O

H cm	L cm	l* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
20.0	150.0	5.0	LFO150001	1.1	167	336
40.3	150.0	25.3	LFO150002	2.2	334	672
60.6	150.0	45.6	LFO150003	3.4	501	1 008
20.0	170.0	5.0	LFO170001	1.2	185	373
40.3	170.0	25.3	LFO170002	2.5	371	746
60.6	170.0	45.6	LFO170003	3.8	557	1 120
20.0	200.0	5.0	LFO200001	1.4	218	439
40.3	200.0	25.3	LFO200002	2.9	436	878
60.6	200.0	45.6	LFO200003	4.3	655	1 317

Optional



Reverse Valve
Vanne reverse
Reverse Ventil
Válvula a escuadra inversa

[BIAN] **E12RVB**
[CROM] **E12RVR**




Built-in valves
Vanne encastrer
Einbauventile
Válvulas de empotrar

[BIAN] **E12VIB**
[CROM] **E12VIR**




Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático

[BIAN] **TTB**
[CROM] **TTR**



Sleeving kit
Kit couvre tuyau
Rosetten
Kit cubre tubo

[BIAN] **C5B**
[CROM] **C5R**



$\varnothing \leq 16$ mm
[BIAN] **CTB**
[CROM] **CTR**

$16 \text{ mm} < \varnothing < 24 \text{ mm}$
[BIAN] **CWB**
[CROM] **CWR**

art* = item / modèle / Artikel / artículo **l*** = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
P* = page / page / Seite / página